


ACROLINK

99.99999% Cu Stressfree Interconnect cable

7N-A2110III

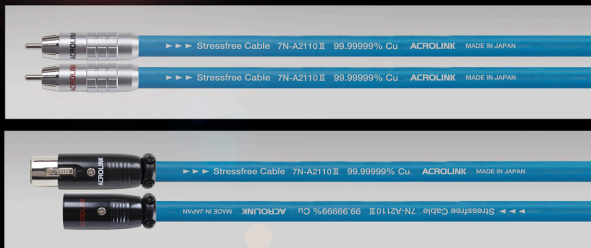

Conductor:	<i>D.U.C.C Stressfree 7N Cu 0.18ϕ x 34 strands</i>
Insulation	<i>High molecule polyolefin</i>
Inner sleeve:	<i>Firm polyolefin resin</i>
Shielding:	<i>Copper foil + double layer 4N5 OFC parallel shielding</i>
Outer sleeve:	<i>High molecule polyolefin</i>
Conductor resistance:	<i>29mΩ/m</i>
Electrostatic capacitance:	<i>59pF/m</i>
Cable diameter:	<i>9.0mm</i>

RCA plug

Center contact pin:	<i>Hollow shaped Tellurium copper</i>
Cold side:	<i>Phosphorus copper</i>
Plating:	<i>Direct rhodium plating</i>
Outer cover:	<i>Brass machined out from solid material</i>

XLR connector

Male side contact pin:	<i>Brass machined out from solid material</i>
Female side contact pin:	<i>Beryllium copper</i>
Plating:	<i>Direct rhodium plating</i>
Outer body:	<i>Zinc</i>

★Standard length for RCA is 0.6m, 1.0m, 1.5m and 1.0m, 1.5m for XLR