


ACROLINK

99.99999% Cu Stressfree High grade Power Cable with C7 connector

7N-P4020III MS

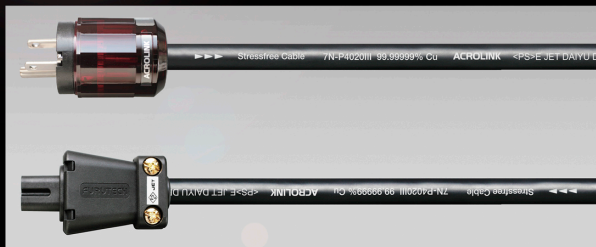

Power plug specifications, Oyaide P-037 (Custom cover color)

Contacts:	Phosphorus bronze
Plating:	Double polished with Silver layered Rhodium plating
Chassis:	Rigid Polyester with 30% glass filler
Cover:	Rigid Polycarbonate

C7 connector specifications, Furutech FI-8N

Contacts:	Phosphorus bronze + Beryllium copper
Plating:	Rhodium plating
Cover:	Nylon with glass filler

Cable specifications

Conductor:	7N Cu Stressfree x 2 (0.26ø x 37strands) 4N Cu Stressfree for ground (0.26ø x 37strands) Conductors are insulated by high molecule polyolefin
Inner sleeve:	High molecule polyolefin + Tungsten powder + amorphous powder
Outer sleeve:	High molecule polyolefin
Cable diameter:	10.6mm
Conductor resistance:	7.5mΩ/m
Electrostatic capacitance:	44pF/m
Standard length:	1.5m

★Custom length & Schuko version available